



Overview

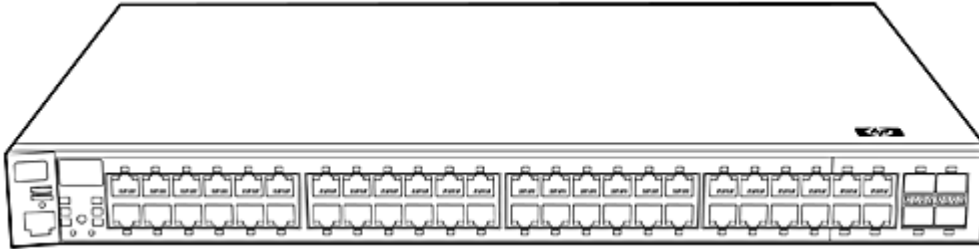

HP 2810-48G Switch

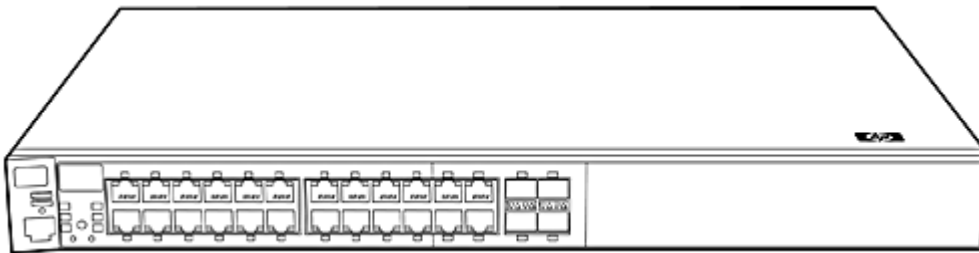

HP 2810-24G Switch

Models

HP 2810-24G Switch

J9021A

HP 2810-48G Switch

J9022A

Key features

- Managed Layer 2 feature set with 24 or 48 Gb ports
- sFlow, source port filtering, enhanced security
- Optional redundant power supply
- Four dual-personality mini-GBIC slots
- Industry-leading warranty

Product overview

The HP 2810 Switch Series consists of two switches: the 24-port HP 2810-24G Switch with 20 10/100/1000 ports, and the 48-port HP 2810-48G Switch with 44 10/100/1000 ports. Each switch also has four dual-personality ports for RJ-45 10/100/1000 or mini-GBIC fiber Gigabit connectivity. Ideal for high-performance and secure 10/100/1000 connectivity, the 2810 switch series offers access security and advanced prioritization and traffic-monitoring capabilities. The series is cost-effective and easy to use, with a shallow, 1U form factor that provides operational flexibility for use in smaller wiring closets.

Features and benefits

Quality of Service (QoS)

- **Class of Service (CoS):** sets the IEEE 802.1p priority tag based on IP address, IP Type of Service (ToS), Layer 3 protocol, TCP/UDP port number, source port, and DiffServ

Overview

- **Layer 4 prioritization:** enables prioritization based on TCP/UDP port numbers
- **Traffic prioritization** (IEEE 802.1p): allows real-time traffic classification with support for eight priority levels mapped to four queues

Connectivity

- **Dual-personality functionality:** four 10/100/1000 ports or SFP slots for optional fiber connectivity such as Gigabit-SX, -LX, and -LH, or 100-FX

Resiliency and high availability

- **IEEE 802.3ad Link Aggregation Protocol (LACP) and HP port trunking:** support up to 24 trunks, each with up to 8 links (ports) per trunk
- **IEEE 802.1s Multiple Spanning Tree:** provides high link availability in multiple VLAN environments by allowing multiple spanning trees; provides legacy support for IEEE 802.1d and IEEE 802.1w
- **Optional redundant power supply:** provides uninterrupted power (provided by HP 600 RPS/EPS)

Manageability

- **sFlow** (RFC 3176): wire-speed traffic accounting and monitoring
- **RMON** (remote monitoring): provides advanced monitoring and reporting capabilities for statistics, history, alarms, and events
- **Dual flash images:** provides independent primary and secondary operating system files for backup while upgrading
- **Troubleshooting:** ingress/egress port monitoring enables network problem-solving
- **Single IP Address Management:** single IP address management for a virtual stack of up to 16 switches
- **Multiple configuration files:** allow multiple configuration files to be stored to a flash image

Layer 2 switching

- **VLAN support and tagging:** supports IEEE 802.1Q (4,094 VLAN IDs) and 256 VLANs simultaneously
- **GARP VLAN Registration Protocol:** allows automatic learning and dynamic assignment of VLANs
- **Jumbo packet support:** supports up to 9220-byte frame size to improve the performance of large data transfers

Security

- **Port security:** allows access only to specified MAC addresses, which can be learned or specified by the administrator
- **Protected ports:** provides increased security by allowing specified ports to be isolated from all other ports on the switch; the protected port or ports can communicate only with the uplink or shared resources
- **MAC address lockout:** prevents particular configured MAC addresses from connecting to the network
- **Multiple user authentication methods:**
 - IEEE 802.1X: is an industry-standard method of user authentication using an IEEE 802.1X supplicant on the client in conjunction with a RADIUS server
 - Web-based authentication: similar to IEEE 802.1X, it provides a browser-based environment to authenticate clients that do not support the IEEE 802.1X supplicant
 - MAC-based authentication: client is authenticated with the RADIUS server based on the client's MAC address
- **Switch management logon security:** can require either RADIUS or TACACS+ authentication for secure switch CLI logon
- **Multiple IEEE 802.1X users per port:** provides authentication of up to two IEEE 802.1X users per port; prevents user "piggybacking" on another user's IEEE 802.1X authentication
- **STP BPDU port protection:** blocks Bridge Protocol Data Units (BPDUs) on ports that do not require BPDUs, preventing forged BPDU attacks
- **Secure FTP:** allows secure file transfer to and from the switch; protects against unwanted file downloads or unauthorized copying of a switch configuration file

Overview

- **RADIUS/TACACS+**: eases switch management security administration by using a password authentication server
- **Source-port filtering**: allows only specified ports to communicate with each other
- **Secure Shell**: encrypts all transmitted data for secure remote CLI access over IP networks
- **Secure Sockets Layer (SSL)**: encrypts all HTTP traffic, allowing secure access to the browser-based management GUI in the switch

Convergence

- **IP multicast snooping and data-driven IGMP**: automatically prevent flooding of IP multicast traffic
- **IEEE 802.1AB Link Layer Discovery Protocol (LLDP)**: is an automated device discovery protocol that provides easy mapping of network management applications
- **Per-port broadcast throttling**: selectively configures broadcast control on heavy traffic port uplinks
- **Software updates**: free downloads from the Web

Ease of use

- **Locator LED (switch)**: allows users to set the locator LED on a specific switch to either turn on, blink, or turn off; simplifies troubleshooting by making it easy to locate a particular switch within a rack of similar switches
- **Friendly port names**: allow assignment of descriptive names to ports
- **Find-Fix-and-Inform**: finds and fixes common network problems automatically, then informs administrator
- **HP/IEEE Auto-MDIX**: automatically adjusts for straight-through or crossover cables on all RJ-45 ports

Warranty and support

- **Lifetime warranty**: for as long as you own the product with advance replacement and next-business-day delivery (available in most countries)†
- **Electronic and telephone support**: limited electronic and telephone support is available from HP; refer to: www.hp.com/networking/warranty for details on the support provided and the period during which support is available
- **Software releases**: refer to: www.hp.com/networking/warranty for details on the software releases provided and the period during which software releases are available for your product(s)

†Hardware warranties replacement for as long as you own the product, with next business day advance replacement (available in most countries). The disk drive included with HP Alliance One Advanced Services and Services z1 Modules, HP Threat Management Services z1 Module, HP AllianceOne Ext z1 Mod w/Rvrbd Stlhd, HP MSM765z1 Mobility Controller and HP Surv Brch Com z1 Mod pwrby Msft Lync has a five-year hardware warranty. For details, refer to the Software license and hardware warranty statements at www.hp.com/networking/warranty.

Technical Specifications

HP 2810-24G Switch (J9021A)	Ports	20 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only 4 dual-personality ports; each port can be used as either an RJ-45 10/100/1000 port or an open mini-GBIC slot (for use with mini-GBIC transceivers)	
	Physical characteristics	Dimensions	12.7(d) x 17.4(w) x 1.7(h) in. (32.26 x 44.2 x 4.32 cm) (1U height)
	Memory and processor	Weight	7.21 lb. (3.27 kg)
		Processor	MIPS @ 264 MHz, 16 MB flash, 64 MB SDRAM; packet buffer size: 0.75 MB
	Mounting	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Latency	Throughput	< 5.6 μ s (FIFO 64-byte packets)
		Switching capacity	up to 35.7 million pps
		MAC address table size	48 Gbps
		MAC address table size	8000 entries
Environment	Operating temperature	Operating relative humidity	32°F to 113°F (0°C to 45°C)
		Nonoperating/Storage temperature	15% to 95% @ 104°F (40°C), noncondensing
		Nonoperating/Storage relative humidity	-40°F to 158°F (-40°C to 70°C)
		Altitude	15% to 95% @ 149°F (65°C), noncondensing
		Acoustic	up to 10,000 ft. (3 km)
Electrical characteristics	Maximum heat dissipation	Maximum heat dissipation	Power: 40.3 dB
		Voltage	164 BTU/hr (173 kJ/hr)
		Current	100-127/200-240 VAC
		Maximum power rating	1.0 A
		Frequency	48 W
		Notes	50/60 Hz
	Safety	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.	
	Emissions	cUL (CSA 22.2 No. 60950); EN 60950/IEC 60950; NOM-019-SCFI-1994; UL 60950	
	Immunity	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A; IEC/EN 61000-3-2; IEC/EN 61000-3-3	
		EN	EN 55024, CISPR 24

Technical Specifications

	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	Voltage dips and interruptions	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	HP PCM+; HP PCM; command-line interface; Web browser; configuration menu; out-of-band management	
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.	
Services	3-year, 4-hour onsite, 13x5 coverage for hardware (U2855E) 3-year, 4-hour onsite, 24x7 coverage for hardware (U2856E) 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (U6304E) 3-year, 24x7 SW phone support, software updates (UE262E) 1-year, post-warranty, 4-hour onsite, 13x5 coverage for hardware (HR889E) 1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware (HR890E) 1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HR891E) Installation with minimum configuration, system-based pricing (U4826E) Installation with HP-provided configuration, system-based pricing (U4830E) 4-year, 4-hour onsite, 13x5 coverage for hardware (UR868E) 4-year, 4-hour onsite, 24x7 coverage for hardware (UR869E) 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR870E) 4-year, 24x7 SW phone support, software updates (UR871E) 5-year, 4-hour onsite, 13x5 coverage for hardware (UR872E) 5-year, 4-hour onsite, 24x7 coverage for hardware (UR873E) 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR874E) 5-year, 24x7 SW phone support, software updates (UR875E) 3 Yr 6 hr Call-to-Repair Onsite (UW356E) 4 Yr 6 hr Call-to-Repair Onsite (UW357E) 5 Yr 6 hr Call-to-Repair Onsite (UW358E) 1-year, 6 hour Call-To-Repair Onsite for hardware (HR893E) 1-year, 24x7 software phone support, software updates (HR892E) 1-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS610E) 1-year, 24x7 software phone support, software updates + 4 hour hardware exchange (HS611E) 3-year, 24x7 software phone support, software updates + Next Business Day	

Technical Specifications

Hardware Exchange (HS612E)
 3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS613E)
 4-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS614E)
 4-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS615E)
 5-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS616E)
 5-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS617E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 2810-48G Switch (J9022A)

Ports	44 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	
	4 dual-personality ports; each port can be used as either an RJ-45 10/100/1000 port or an open mini-GBIC slot (for use with mini-GBIC transceivers)	
Physical characteristics	Dimensions	12.7(d) x 17.4(w) x 1.7(h) in. (32.26 x 44.2 x 4.32 cm) (1U height)
	Weight	8.6 lb. (3.9 kg)
Memory and processor	Processor	MIPS @ 264 MHz, 16 MB flash, 64 MB SDRAM; packet buffer size: 1.5 MB
	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Latency	< 5.4 µs (FIFO 64-byte packets)
	Throughput	up to 71.4 million pps
	Switching capacity	96 Gbps
	MAC address table size	8000 entries
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)
	Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 10,000 ft. (3 km)
	Acoustic	Power: 40.5 dB
Electrical characteristics	Maximum heat dissipation	341 BTU/hr (360 kJ/hr)
	Voltage	100-127/200-240 VAC

Technical Specifications

	Current	1.5 A
	Maximum power rating	92 W
	Frequency	50/60 Hz
	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.
Safety	cUL (CSA 22.2 No. 60950); EN 60950/IEC 60950; NOM-019-SCFI-1994; UL 60950	
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A; IEC/EN 61000-3-2; IEC/EN 61000-3-3	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.5 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	Voltage dips and interruptions	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	HP PCM+; HP PCM; command-line interface; Web browser; configuration menu; out-of-band management	
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.	
Services	3-year, 4-hour onsite, 13x5 coverage for hardware (H4496E) 3-year, 4-hour onsite, 24x7 coverage for hardware (H2893E) 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (U6319E) 3-year, 24x7 SW phone support, software updates (UE264E) 1-year, post-warranty, 4-hour onsite, 13x5 coverage for hardware (HR894E) 1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware (HR895E) Installation with minimum configuration, system-based pricing (U4826E) Installation with HP-provided configuration, system-based pricing (U4830E) 4-year, 4-hour onsite, 13x5 coverage for hardware (UR884E) 4-year, 4-hour onsite, 24x7 coverage for hardware (UR885E) 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR886E) 4-year, 24x7 SW phone support, software updates (UR887E) 5-year, 4-hour onsite, 13x5 coverage for hardware (UR888E)	

Technical Specifications

5-year, 4-hour onsite, 24x7 coverage for hardware (UR889E)
 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR890E)
 5-year, 24x7 SW phone support, software updates (UR891E)
 3 Yr 6 hr Call-to-Repair Onsite (UW365E)
 4 Yr 6 hr Call-to-Repair Onsite (UW366E)
 5 Yr 6 hr Call-to-Repair Onsite (UW367E)
 1-year, 6 hour Call-To-Repair Onsite for hardware (HR898E)
 1-year, 24x7 software phone support, software updates (HR897E)
 1-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support and software updates (HR896E)
 1-year, 24x7 software phone support, software updates + 4 hour hardware exchange (HS618E)
 1-year, 24x7 software phone support, software updates + 4 hour hardware exchange (HS619E)
 3-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS620E)
 3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS621E)
 3-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS621E)
 4-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS622E)
 4-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS623E)
 5-year, 24x7 software phone support, software updates + Next Business Day Hardware Exchange (HS624E)
 5-year, 24x7 software phone support, software updates + 4 hour Hardware Exchange (HS625E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Standards and protocols	Device Management	HTML and telnet management
	General Protocols	IEEE 802.1D MAC Bridges IEEE 802.1p Priority IEEE 802.1Q VLANs IEEE 802.1s Multiple Spanning Trees IEEE 802.1w Rapid Reconfiguration of Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.3x Flow Control RFC 768 UDP RFC 783 TFTP Protocol (revision 2) RFC 792 ICMP RFC 793 TCP RFC 826 ARP RFC 854 TELNET RFC 951 BOOTP RFC 1542 BOOTP Extensions

Technical Specifications

IP Multicast

RFC 2030 Simple Network Time Protocol (SNTP) v4

RFC 3376 IGMPv3

MIBs

RFC 1213 MIB II

RFC 1493 Bridge MIB

RFC 1573 SNMP MIB II

RFC 2021 RMONv2 MIB

RFC 2096 IP Forwarding Table MIB

RFC 2613 SMON MIB

RFC 2618 RADIUS Client MIB

RFC 2620 RADIUS Accounting MIB

RFC 2665 Ethernet-Like-MIB

RFC 2668 802.3 MAU MIB

RFC 2674 802.1p and IEEE 802.1Q Bridge MIB

RFC 2737 Entity MIB (Version 2)

RFC 2863 The Interfaces Group MIB

RFC 3418 MIB for SNMPv3

Network Management

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)

RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9 (events)

RFC 3176 sFlow

SNMPv1/v2c/v3

Security

IEEE 802.1X Port Based Network Access Control

RFC 1492 TACACS+

RFC 2138 RADIUS Authentication

RFC 2866 RADIUS Accounting

Secure Sockets Layer (SSL)

SSHv2 Secure Shell

Accessories

HP E2810 Switch Series accessories

Transceivers

HP X111 100M SFP LC FX Transceiver	J9054C
HP X112 100M SFP LC BX-D Transceiver	J9099B
HP X112 100M SFP LC BX-U Transceiver	J9100B
HP X121 1G SFP LC LH Transceiver	J4860C
HP X121 1G SFP LC SX Transceiver	J4858C
HP X121 1G SFP LC LX Transceiver	J4859C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B

Cables

HP 0.5 m Multimode OM3 LC/LC Optical Cable	AJ833A
HP 1 m Multimode OM3 LC/LC Optical Cable	AJ834A
HP 2 m Multimode OM3 LC/LC Optical Cable	AJ835A
HP 5 m Multimode OM3 LC/LC Optical Cable	AJ836A
HP 15 m Multimode OM3 LC/LC Optical Cable	AJ837A
HP 30 m Multimode OM3 LC/LC Optical Cable	AJ838A
HP 50 m Multimode OM3 LC/LC Optical Cable	AJ839A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable	QK732A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable	QK733A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable	QK734A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable	QK735A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable	QK736A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 50m Cable	QK737A

Power Supply

HP 600 Redundant and External Power Supply	J8168A
--	--------

Mounting Kit

HP X410 1U Universal 4-Post Rack Mounting Kit	J9583A
---	--------

Accessory Product Details

NOTE: Details are not available for all accessories. The following specifications were available at the time of publication.

HP X111 100M SFP LC FX Transceiver (J9054C) HP X111 100M SFP LC FX Transceiver: An SFP format 100-megabit transceiver with LC connectors using FX technology.	Ports	1 LC 100BASE-FX port (IEEE 802.3u Type 100BASE-FX); Duplex: half or full
	Physical characteristics	Dimensions: 2.7(d) x 0.54(w) x 0.48(h) in. (6.86 x 1.38 x 1.22 cm) Weight: 0.06 lb. (0.03 kg)
	Environment	Operating temperature: 32°F to 158°F (0°C to 70°C) Operating relative humidity: 5% to 95% Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C) Nonoperating/Storage relative humidity: 5% to 85% Altitude: up to 10,000 ft. (3 km)
	Cabling	Cable type: 62.5/125 μ m or 50/125 μ m (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; Maximum distance: • 2 km (full duplex) or 412 m (half duplex)
	Notes	Transmitter wavelength: 1310nm Power consumption is 1.1 watt maximum. For supported platforms and minimum software requirements to support this product, see the document titled "Support for the J9054B 100-FX SFP-LC Transceiver" on the "ProCurve Mini-GBICs and SFPs" Manuals Web page.
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X112 100M SFP LC BX-D Ports Transceiver (J9099B) A small form-factor pluggable (SFP) 100-Megabit BX (bi-directional) "downstream" transceiver that provides 100 Mbps full-duplex connectivity up to 10 km on one strand of singlemode fiber. The J9099B connects to the J9100B "upstream" transceiver, or to any IEEE-standard 100BASE-BX10-U ("upstream") device.	Ports	1 LC 100BASE-BX10 port (IEEE 802.3ah Type 100BASE-BX10-D); Duplex: full only
	Physical characteristics	Dimensions 2.7(d) x 0.55(w) x 0.48(h) in. (6.86 x 1.39 x 1.22 cm) Weight 0.04 lb. (0.03 kg)
	Environment	Operating temperature 32°F to 158°F (0°C to 70°C) Operating relative humidity 0% to 95%, noncondensing Nonoperating/Storage temperature -40°F to 185°F (-40°C to 85°C)
	Cabling	Type: Single-mode fiber optic, complying with ITU-T G.652; Maximum distance: • 0.5-10,000 m (single-mode fiber)
	Notes	Transmit wavelength: 1550 nm. Receive wavelength: 1310 nm. Power consumption is 1.1 watt maximum. For supported platforms and minimum software requirements to support this

Accessory Product Details

Services

product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page.

The J9099B connects to the J9100B "upstream" transceiver, or to any IEEE-standard 100BASE-BX10-U ("upstream") device. (A 100-BX-D transceiver can only connect to a 100-BX-U product. You cannot connect two 100-BX-D transceivers together.)

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X112 100M SFP LC BX-U Ports Transceiver (J9100B)

A small form-factor pluggable (SFP) 100-Megabit BX (bi-directional) "upstream" transceiver that provides 100 Mbps full-duplex connectivity up to 10 km on one strand of singlemode fiber. The J9100B connects to the J9099B "downstream" transceiver, or to any IEEE-standard 100BASE-BX10-D ("downstream") device.

Physical characteristics

Environment

Cabling

Notes

Services

1 LC 100BASE-BX10 port (IEEE 802.3ah Type 100BASE-BX10-U); Duplex: full only

Dimensions

2.7(d) x 0.55(w) x 0.48(h) in. (6.86 x 1.39 x 1.22 cm)

Weight

0.07 lb. (.03 kg)

Operating temperature

32°F to 158°F (0°C to 70°C)

Operating relative humidity

0% to 95%, noncondensing

Nonoperating/Storage temperature

-40°F to 185°F (-40°C to 85°C)

Type:

Single-mode fiber optic, complying with ITU-T G.652;

Maximum distance:

- 0.5-10,000 m (single-mode fiber)

For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page.

The J9100B connects to the J9099B "downstream" transceiver, or to any IEEE-standard 100BASE-BX10-D ("downstream") device. (A 100-BX-U transceiver can only connect to a 100-BX-D product. You cannot connect two 100-BX-U transceivers together.)

Transmit wavelength: 1310 nm. Receive wavelength: 1550 nm.

Power consumption is 1.1 watts maximum.

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X121 1G SFP LC LH Transceiver (J4860C)

A small form-factor pluggable (SFP) Gigabit LH transceiver that provides a full-duplex Gigabit solution up to 70 km on single-mode fiber.

Ports

1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics); Duplex: full only

Physical characteristics

Dimensions: 2.17(d) x 0.60(w) x 0.46(h) in. (5.5 x 1.53 x 1.18 cm)
Weight: 0.04 lb. (0.02 kg)

Environment

Operating temperature: -40°F to 185°F (-40°C to 85°C)
Operating relative humidity: 0% to 95% @ 77°F (25°C), noncondensing
Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C)
Altitude: up to 10,000 ft. (3 km)

Cabling

Cable type:

- Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1;

Maximum distance:

- 10-70,000 m (single-mode fiber)

Notes

Power consumption is 0.8 watts typical with 1 watt maximum at 100% utilization.
For distances less than 20 km, a 10 dB attenuator must be used.
For distances between 20 km and 40 km, a 5 dB attenuator must be used.
Attenuators can be purchased from most cable vendors.

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X121 1G SFP LC SX Transceiver (J4858C)

A small form-factor pluggable (SFP) Gigabit SX transceiver that provides a full-duplex Gigabit solution up to 550 m on multimode fiber.

Ports

1 LC 1000BASE-SX port; Duplex: full only

Physical characteristics

Dimensions: 2.24(d) x 0.54(w) x 0.48(h) in. (5.69 x 1.37 x 1.22 cm)
Weight: 0.04 lb. (0.02 kg)
Transceiver form factor: SFP

Environment

Operating temperature: 32°F to 158°F (0°C to 70°C)
Operating relative humidity: 5% to 85%, noncondensing
Nonoperating/Storage temperature: -40°F to 203°F (-40°C to 85°C)
Altitude: up to 10,000 ft. (3 km)

Electrical characteristics

Power consumption typical: 0.4 W
Power consumption maximum: 0.7 W

Cabling

Type:

- 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively;

Maximum distance:

- 2-220 m (62.5 µm core diameter, 160 MHz*km bandwidth)
- 2-275 m (62.5 µm core diameter, 200 MHz*km bandwidth)
- 2-500 m (50 µm core diameter, 400 MHz*km bandwidth)
- 2-550 m (50 µm core diameter, 500 MHz*km bandwidth)

Cable length: 2-550m

Fiber type: Multi Mode

Accessory Product Details

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X121 1G SFP LC LX Transceiver (J4859C)

HP X121 1G SFP LC LX Transceiver: An SFP format gigabit transceiver with LC connectors using LX technology.

Ports

Physical characteristics

1 LC 1000BASE-LX port (IEEE 802.3z Type 1000BASE-LX); Duplex: full only

Dimensions: 2.24(d) x 0.54(w) x 0.486(h) in. (5.69 x 1.37 x 1.23 cm)

Weight: 0.04 lb. (0.02 kg)

Environment

Operating temperature: 32°F to 158°F (0°C to 70°C)

Operating relative humidity: 0% to 85%, noncondensing

Nonoperating/Storage temperature: -40°F to 212°F (-40°C to 100°C)

Altitude: up to 10,000 ft. (3 km)

Cabling

Type:

- Either single mode or multimode; 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1;

Maximum distance:

- 2-550 m (multimode 62.5 µm core diameter, 500 MHz*km bandwidth)
- 2-550 m (multimode 50 µm core diameter, 400 MHz*km bandwidth)
- 2-550 m (multimode 50 µm core diameter, 500 MHz*km bandwidth)
- 2-10,000 m (single-mode fiber)

Notes

A mode conditioning patch cord may be needed in some multimode fiber installations.

Wavelength: 1310nm

Power Consumption: < 500mW Typical

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X122 1G SFP LC BX-D Transceiver (J9142B)

A small form-factor pluggable (SFP) Gigabit-BX (bi-directional) "downstream" transceiver that provides a full-duplex Gigabit solution up to 10 km on one strand of single-mode fiber. The J9142B connects to the J9143B "upstream" transceiver, or to any IEEE-standard 1000BASE-BX10-U ("upstream") device.

Ports

1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-D); Duplex: full only

Physical characteristics

Dimensions

2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)

Weight

0.04 lb. (0.02 kg)

Environment

Operating temperature

32°F to 158°F (0°C to 70°C)

Operating relative humidity

0% to 95%, non-condensing

Non-operating/Storage temperature

–40°F to 185°F –40°C to 85°C)

Cabling

Type:

Single-mode fiber optic, complying with ITU-T G.652;

Maximum distance:

- 0.5-10,000 m (single-mode fiber)

Notes

Transmit wavelength: 1490 nm. Receive wavelength: 1310 nm.

Power consumption is 1 watt maximum.

For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page.

The J9142B connects to the J9143B "upstream" transceiver, or to any IEEE-standard 1000BASE-BX10-U ("upstream") device. (A 1000-BX-D transceiver can only connect to a 1000-BX-U product. You cannot connect two 1000-BX-D transceivers together.)

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X122 1G SFP LC BX-U Transceiver (J9143B)

A small form-factor pluggable (SFP) Gigabit-BX (bi-directional) "upstream" transceiver that provides a full-duplex Gigabit solution up to 10 km on one strand of single-mode fiber. The J9143B connects to the J9142B "downstream" transceiver, or to any IEEE-standard 1000BASE-BX10-D ("downstream") device.

Ports

1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-U); Duplex: full only

Physical characteristics

Dimensions

2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)

Weight

0.04 lb. (0.02 kg)

Environment

Operating temperature

32°F to 158°F (0°C to 70°C)

Operating relative humidity

0% to 95%, non-condensing

Non-operating/Storage temperature

–40°F to 185°F –40°C to 85°C)

Cabling

Type:

Single-mode fiber optic, complying with ITU-T G.652;

Maximum distance:

- 0.5-10,000 m (single-mode fiber)

Notes

Transmit wavelength: 1310 nm. Receive wavelength: 1490 nm.

Accessory Product Details

For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page.

The J9143B connects to the J9142B "downstream" transceiver, or to any IEEE-standard 1000BASE-BX10-D ("downstream") device. (A 1000-BX-U transceiver can only connect to a 1000-BX-D product. You cannot connect two 1000-BX-U transceivers together.)

Power consumption is 1 watt maximum.

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 0.5 m Multimode OM3 LC/LC Optical Cable (AJ833A)

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm
- Optical glass: Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical glass: Bandwidth: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber and designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP 1 m Multimode OM3
LC/LC Optical Cable**
(AJ834A)

Cabling

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP 2 m Multimode OM3
LC/LC Optical Cable**
(AJ835A)

Cabling

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu\text{m}$ Cladding diameter: $125 \pm 2.0\mu\text{m}$ Coating diameter: $245 \pm 10\mu\text{m}$
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP 5 m Multimode OM3
LC/LC Optical Cable**
(AJ836A)

Cabling

Cable type:

50/125 µm core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: This specification defines the detail requirements for a tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu\text{m}$ Cladding diameter: $125 \pm 2.0\mu\text{m}$ Coating diameter: $245 \pm 10\mu\text{m}$
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 15 m Multimode OM3 Cabling
LC/LC Optical Cable
(AJ837A)

Notes

Cable type:

50/125 μ m (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μ m fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu$ m Cladding diameter: $125 \pm 2.0\mu$ m Coating diameter: $245 \pm 10\mu$ m
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 μ m multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 30 m Multimode OM3 LC/LC Optical Cable
(AJ838A) **Cabling**

Notes

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu\text{m}$ Cladding diameter: $125 \pm 2.0\mu\text{m}$ Coating diameter: $245 \pm 10\mu\text{m}$
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 50 m Multimode OM3 Cabling
LC/LC Optical Cable
(AJ839A)

Notes

Cable type:

50/125 μ m (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μ m fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu\text{m}$ Cladding diameter: $125 \pm 2.0\mu\text{m}$ Coating diameter: $245 \pm 10\mu\text{m}$
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 μ m multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
1m Cable (QK732A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core Diameter: 50um $\pm$ 3um, Cladding diameter: 125um $\pm$ 2um; Coating diameter: 245 $\pm$ 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
2m Cable (QK733A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um $\pm$ 3um, Cladding diameter: 125um $\pm$ 2um; Coating diameter: 245 $\pm$ 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
5m Cable (QK734A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um $\pm$ 3um, Cladding diameter: 125um $\pm$ 2um; Coating diameter: 245 $\pm$ 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
15m Cable (QK735A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um $\pm$ 3um, Cladding diameter: 125um $\pm$ 2um; Coating diameter: 245 $\pm$ 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
30m Cable (QK736A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um $\pm$ 3um, Cladding diameter: 125um $\pm$ 2um; Coating diameter: 245 $\pm$ 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
50m Cable (QK737A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um $\pm$ 3um, Cladding diameter: 125um $\pm$ 2um; Coating diameter: 245 $\pm$ 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP 600 Redundant and
External Power Supply
(J8168A)**

Ports

6 redundant power supply ports
Restrictions: Each port can provide redundant +12 V power to a connected switch; only one port can provide power at a given time

2 external power supply ports
Restrictions: Provides 50 VDC external PoE to up to two switch devices; provides max. of 408 W full power to one device, and half power (204 W each) if connected to two devices

Accessory Product Details

Physical characteristics	Dimensions	12.83(d) x 17.44(w) x 1.73(h) in. (32.59 x 44.3 x 4.39 cm) (1U height)
	Weight	11.78 lb. (5.34 kg), Fully loaded
Mounting	1U rack-mountable and wall-mountable enclosure using standard mounting hardware	
Environment	Operating temperature	32°F to 131°F (0°C to 55°C)
	Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 15,000 ft. (4.6 km)
	Acoustic	Noise emission LwA=59.2 dB at virtual workspace, according to DIN 45635 T.19
	Description	The unit automatically adjusts to any voltage between 100-240 V and either 50 or 60 Hz
Electrical characteristics	Voltage	100-240 VAC
	Current	9/5 A
	Maximum power rating	800 W
	RPS power	180 W
	PoE power	408 W
	Frequency	50/60 Hz
	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.
Safety	CSA 22.2 No. 60950; EN 60950/IEC 60950; UL 60950	
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2; 4 kV CD, 8 kV AD
	Radiated	IEC 61000-4-3; 3 V/m
	EFT/Burst	IEC 61000-4-4; 1.0 kV (power line), 0.05 kV (signal line)
	Surge	IEC 61000-4-5; 1 kV/2 kV AC
	Conducted	IEC 61000-4-6; 3 V
	Power frequency magnetic field	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	Voltage dips and interruptions	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods

Accessory Product Details

	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	Provides information via port interfaces of attached devices	
Notes	Supported devices HP Switch 2600-PWR Series, Switch 2610 Series, Switch 2610-PWR Series, Switch 2800 Series, Switch 2810 Series, Switch 5300xl Series, Switch 3400cl Series, Switch 6400cl Series, and Secure Router 7000dl Series	
Services	3-year, 4-hour onsite, 13x5 coverage for hardware (U9270E) 3-year, 4-hour onsite, 24x7 coverage for hardware (U9271E) 4-year, 4-hour onsite, 13x5 coverage for hardware (UR854E) 4-year, 4-hour onsite, 24x7 coverage for hardware (UR855E) 5-year, 4-hour onsite, 13x5 coverage for hardware (UR857E) 5-year, 4-hour onsite, 24x7 coverage for hardware (UR858E) 3 Yr 6 hr Call-to-Repair Onsite (UW371E) 4 Yr 6 hr Call-to-Repair Onsite (UW372E) 5 Yr 6 hr Call-to-Repair Onsite (UW373E)	
	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP X410 1U Universal 4-post Rack Mounting Kit (J9583A)

Notes	The rack mounting kit supports the 1U, full width switches in the following switch series and the power supply: 1810 Series, 2510 Series, 2520 Series, 2610 Series, 2810 Series, 2910 Series, 3500 Series, and the 620 Power Supply. This universal rack mounting kit is design to fit the following racks: HP 10K 10642, HP 10K 10842, Panduit CN, Panduit CS, Wrightline Vantage S2, APC Netshelter 600mm, and APC Netshelter 800mm. It may well fit many other brands and models too.
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

To learn more, visit: www.hp.com/networking

© Copyright 2013 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.